



EXTRUDED SILICONE SEAL

W30-51-81
6/07

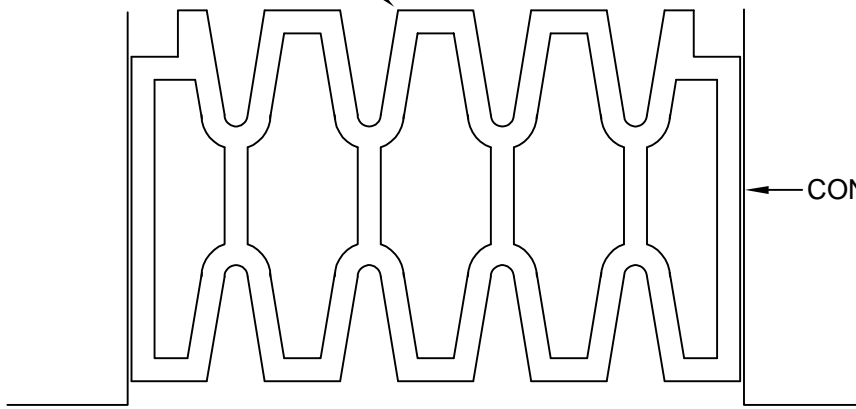

SMOOTH SURFACE APPLICATION

EXTRUDED SILICONE SEAL

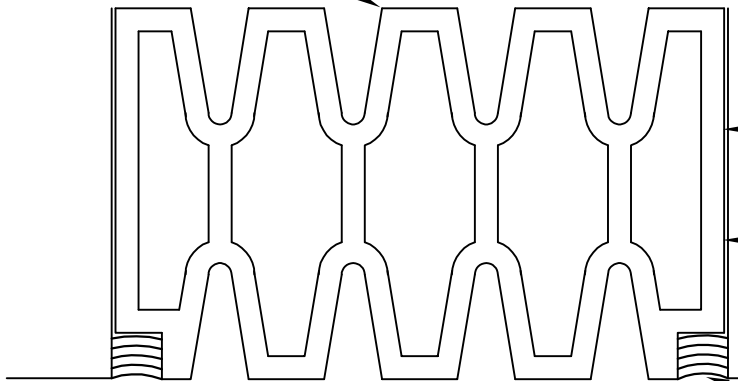

BRICK AND BLOCK APPLICATION

CONTINUOUS SILICONE SEALAN

BOND BREAKER TAPE

EXPOSED SEALANT TO SEAL VOIDS AT ROUGH SURFACES

COMPRESSION SEALS - SILICONE SEISMIC JOINT SEALS
 SECURE WITH HIGH - QUALITY COMPATIBLE SEALANT / ADHESIVE
 MEETS ASTM D2000, 4GE, 709M
 UV STABILIZED
 DOES NOT PROPAGATE FLAME
 EXTRUDED SIZE: 3.63" x 1.5"
 NOMINAL JOINT WIDTH: 3"
 MIN. COMPRESSION: 1.38"
 MAX. EXTENSION: 6"
 COLOR AS SELECTED BY ARCHITECT

CUSTOMER:		
PROJECT:		
LOCATION:		
ARCHITECT:		
CONTRACTOR:		
NOTE:		
JOB NO.:	DATE:	SCALE: (NTS)

MARK:	QTY:	LENGTH:	LOCATION: